

Designated client product

This product will be discontinued its production in the near term.
And it is provided for customers currently in use only, with a time limit.
It can not be available for your new project. Please select other new or existing products.

For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.

www.njr.com

4-INPUT 1MUTE VIDEO SWITCH

■ GENERAL DESCRIPTION

The **NJM2293** is a switching IC for switching over from one audio or video input signal to another. It is a higher efficiency video switch, featuring the operating voltage 4.75 to 13V, the frequency feature 7MHz, and then the Crosstalk 75dB (at 4.43MHz).

■ FEATURES

- 4 Input-1 Output
- Operating Voltage (+4.75 to +13V)
- Crosstalk 75dB (at 4.43MHz)
- Wide Bandwidth Frequency 7MHz (2V_{P-P} Input)
- Package Outline DIP16, DMP16
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V⁺ 4.75 to 13.0V

■ APPLICATIONS


- VCR, Video Camera, AV-TV, Video Disk Player.

■ BLOCK DIAGRAM

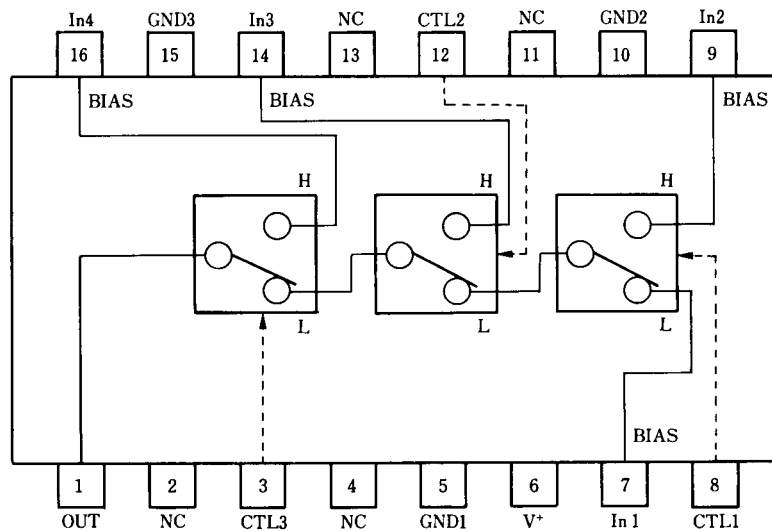


NJM2293D
NJM2293M

■ PACKAGE OUTLINE



NJM2293D



NJM2293M

NJM2293

■ MAXIMUM RATINGS

($T_a = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-----------|----------------------------|------------------|
| Supply Voltage | V^+ | 14 | V |
| Power Dissipation | P_D | (DIP16) 700 (DMP16) 350 | mW mW |
| Operating Temperature Range | T_{opr} | -40 to +85 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +125 | $^\circ\text{C}$ |

■ ELECTRICAL CHARACTERISTICS

($V^+ = 5\text{V}$, $T_a = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------|-----------|---|------|------|------|------|
| Operating Current (1) | I_{CC1} | $V^+ = 5\text{V}$ (Note1) | 4.5 | 6.5 | 8.5 | mA |
| Operating Current (2) | I_{CC2} | $V^+ = 9\text{V}$ (Note1) | 5.8 | 8.3 | 10.8 | mA |
| Voltage Gain | G_V | $V_I = 100\text{kHz}$, $2V_{P-P}$, V_O / V_I | -0.7 | -0.2 | +0.3 | dB |
| Frequency Gain (1) | G_{F1} | $V_I = 2V_{P-P}$, V_O (7MHz) / V_O (100kHz) | -1.0 | 0 | +1.0 | dB |
| Frequency Gain (2) | G_{F2} | $V_I = 1V_{P-P}$, V_O (10MHz) / V_O (100kHz) | - | 0 | - | dB |
| Differential Gain | DG | $V_I = 2V_{P-P}$, Standard Staircase Signal | - | 0.3 | - | % |
| Differential Phase | DP | $V_I = 2V_{P-P}$, Standard Staircase Signal | - | 0.3 | - | deg |
| Output offset Voltage | V_{OS} | (Note2) | -4.5 | 0 | +45 | mV |
| Crosstalk | CT | $V_I = 2V_{P-P}$, 4.43MHz, V_O / V_I | - | -75 | - | dB |
| Switch Change Over Voltage | V_{CH} | All inside Switches ON | 2.5 | - | - | V |
| Switch Change Over Voltage | V_{CL} | All inside Switches OFF | - | - | 1.0 | V |


(Note1) $S_1 = S_2 = S_3 = S_4 = S_5 = S_6 = S_7 = 1$

(Note2) $S_1 = S_2 = S_3 = S_4 = 1$ Measure the output DC voltage difference

a) $S_5 = S_6 = S_7 = 1$, b) $S_7 = 2$, $S_5 = S_6 = 1$

c) $S_6 = 2$, $S_5 = 1$ d) $S_5 = 2$

■ TEST CIRCUIT

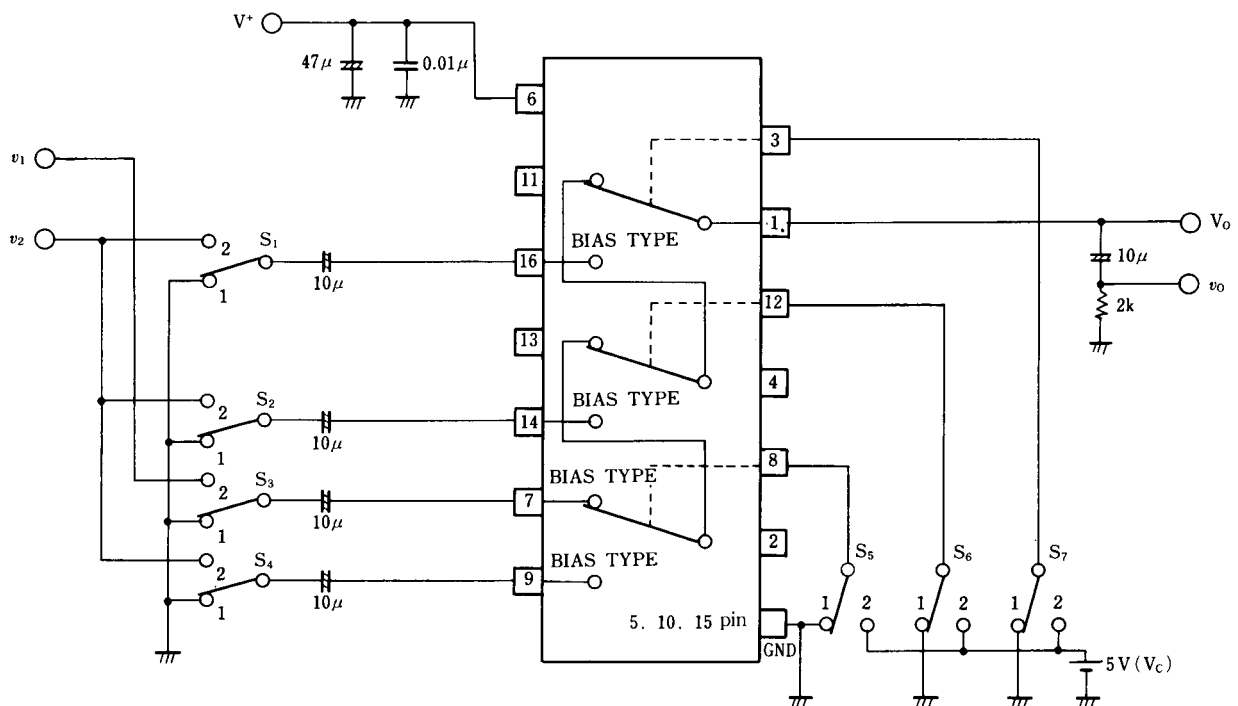


■ TERMINAL EXPLANATION

| PIN No. | PIN NAME | VOLTAGE | INSIDE EQUIVALENT CIRCUIT |
|--------------------|---|---------|---------------------------|
| 7 9 14 16 | IN 1 IN 2 IN 3 IN 4 [Input] | 2.5V | |
| 8 12 3 | CTL 1 CTL 2 CTL 3 [Switching] | | |
| 1 | OUT [Output] | 1.8V | |
| 6 | V ⁺ | 5V | |
| 5 10 15 | GND 1 GND 2 GND 3 | | |

■ APPLICATION

This IC requires 0.1 μ F capacitor between INPUT and GND for bias type input at mute mode.

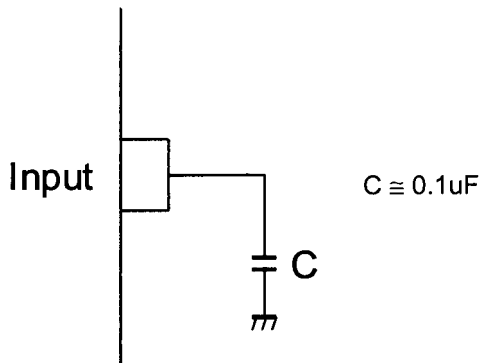

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.