


## VHF/UHF BAND RF AMPLIFIER

### ■ GENERAL DESCRIPTION

The **NJM2275** is a low current, low voltage RF amplifier, especially designed for VHF/UHF band.

The center frequency of this narrow band amplifier is changed by external components.

### ■ PACKAGE OUTLINE




**NJM2275F1**

### ■ FEATURES

- Wide Operating Voltage                    1.8V to 6V
- Low Operating Current                    0.8mA type. @ V<sup>+</sup>=1.9V, no signal input
- High Gain
  - Power Gain                                    15dB @1.9V, 400MHz input
  - Voltage Gain                                30dB @1.9V, 400MHz input, 1kΩ load
- Operating Frequency band                Up to 800MHz
- High Isolation (OUT to IN)              45dB @1.9V, 400MHz
- Bipolar Technology
- Package Outline                             SOT-23-6-1



### ■ PIN CONFIGURATION

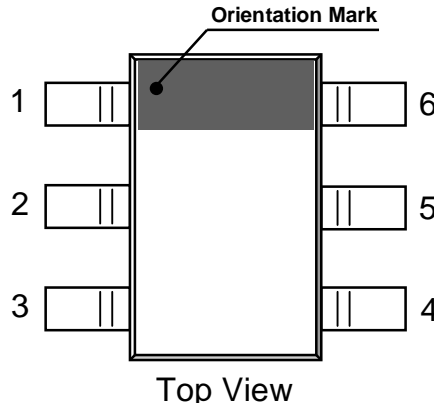

#### Pin Function

1. RF IN
2. GND
3. BIAS CAP
4. RF OUT
5. I REF
6. V+

### ■ Simplified Block Diagram

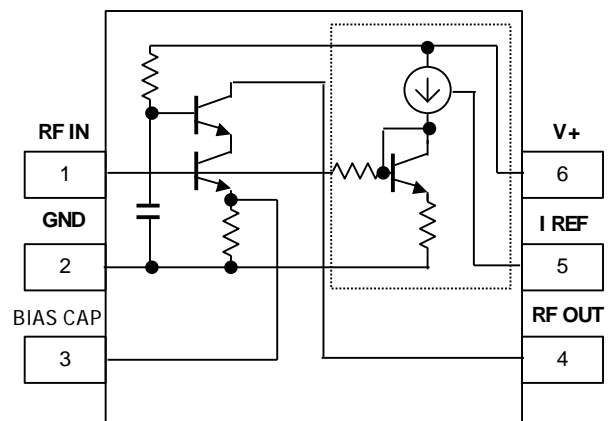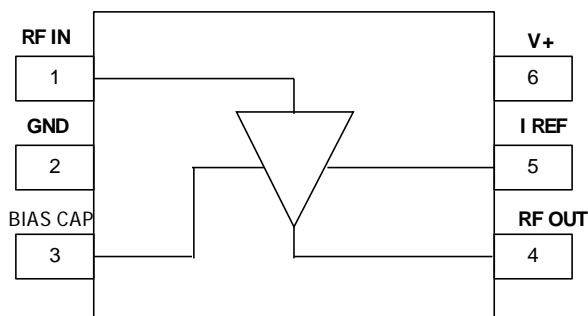

**■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	10.0	V
Power Dissipation	P <sub>D</sub>	200	mW
RF Input Level	Pinmax	6	dBm
Operating Temperature	T <sub>opr</sub>	- 40 to + 85	°C
Storage Temperature	T <sub>stg</sub>	- 40 to +125	°C

**■ RECOMMENDED OPERATING CONDITIONS (Ta=25°C)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V <sup>+</sup>		1.8	1.9	6.0	V


**■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V<sup>+</sup>=1.9V, fin=400MHz, unless otherwise noted)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Current	I <sub>cc</sub>	No signal	-	0.8	1.0	mA
Power Gain	PG	Pin= - 40dBm Test circuit 1	-	15	-	dB
Voltage Gain	VG	Pin= - 40dBm Test circuit 2	-	30	-	dB
Noise Figure	NF	Test Circuit 3	-	2.2	-	dB
Input Return Loss	IS11I	Pin= - 40dBm Test Circuit 4	-	- 8	-	dB
Output Return Loss	IS22I	Pin= - 40dBm Test Circuit 4	-	- 20	-	dB
RF OUT - RF IN Isolation	ISL	Pin= - 40dBm Test Circuit1	-	45	-	dB
Power Input at 1dB compression Point	P <sub>-1dB</sub>	Test Circuit1	-	- 28	-	dBm


■ TEST CIRCUIT

These test circuits allow the measurement of all parameters described in "ELECTRICAL CHARACTERISTICS".

● Test Circuit 1 for  $I_{cc}$ ,  $P_G$ ,  $P_{-1dB}$  and  $P_{in}$  vs.  $P_{out}$

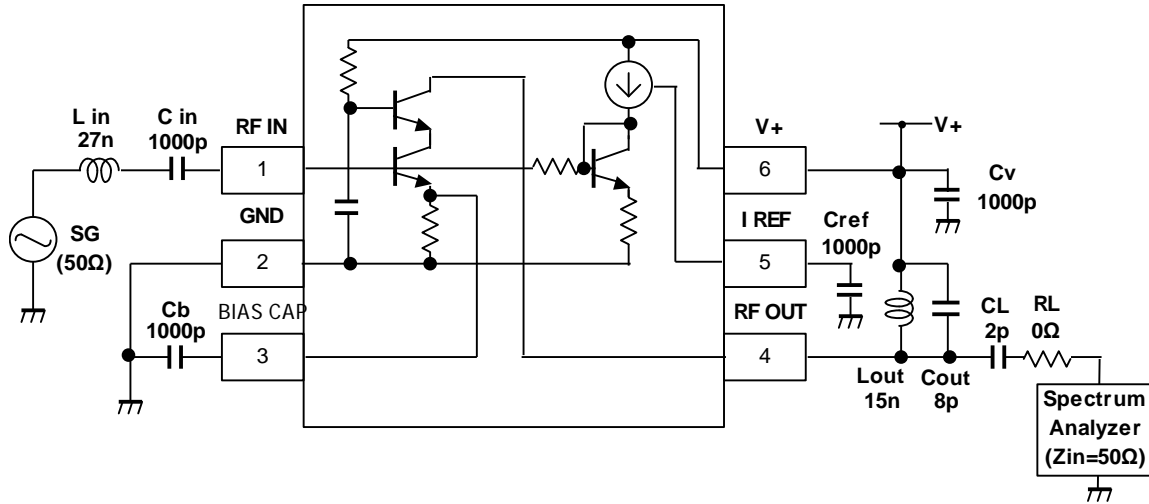

● Test Circuit 2 for  $V_G$

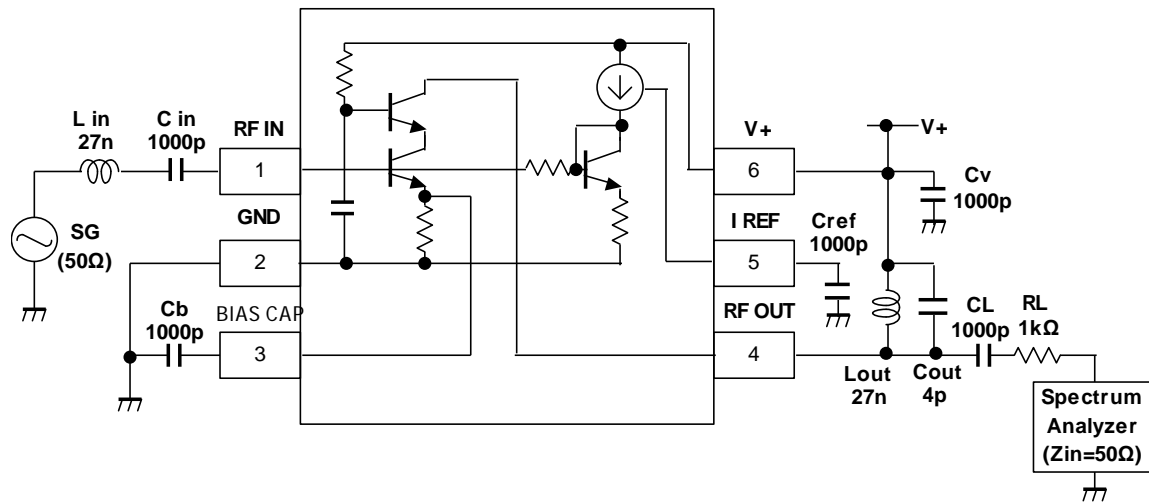

$P_G$  and  $V_G$  has the following relation.

$$P_G = P_{out} - P_{in}$$

$$V_G = (P_{out} + P_{rl}) - P_{in}$$

where

$P_{in}$  = input level in dBm

$P_{out}$  = output level in dBm


$P_{rl}$  = the loss caused by the voltage drop of  $R_L$ .

$R_L$  is 1000  $\Omega$ . The input impedance of spectrum analyzer  $Z_{in}$  is 50 $\Omega$ .  $P_{rl}$  is calculated from


$$P_{rl} = 20 \log \left( \frac{R_L + Z_{in}}{R_L} \right)$$

$$P_{rl} = 20 \log \left( \frac{1050}{50} \right)$$


● Test Circuit 3 for NF

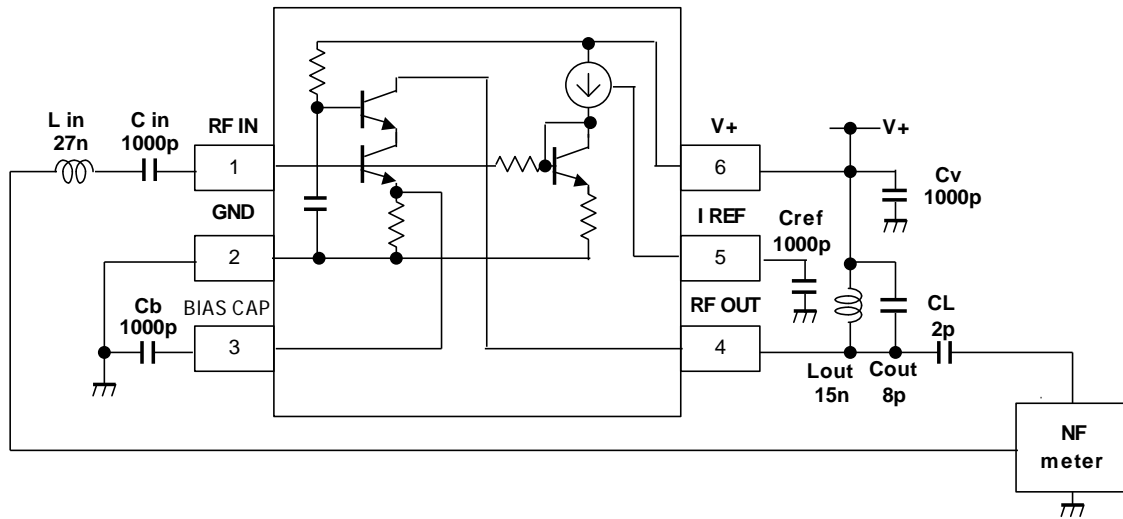

● Test Circuit 4 for IS11 and IS21

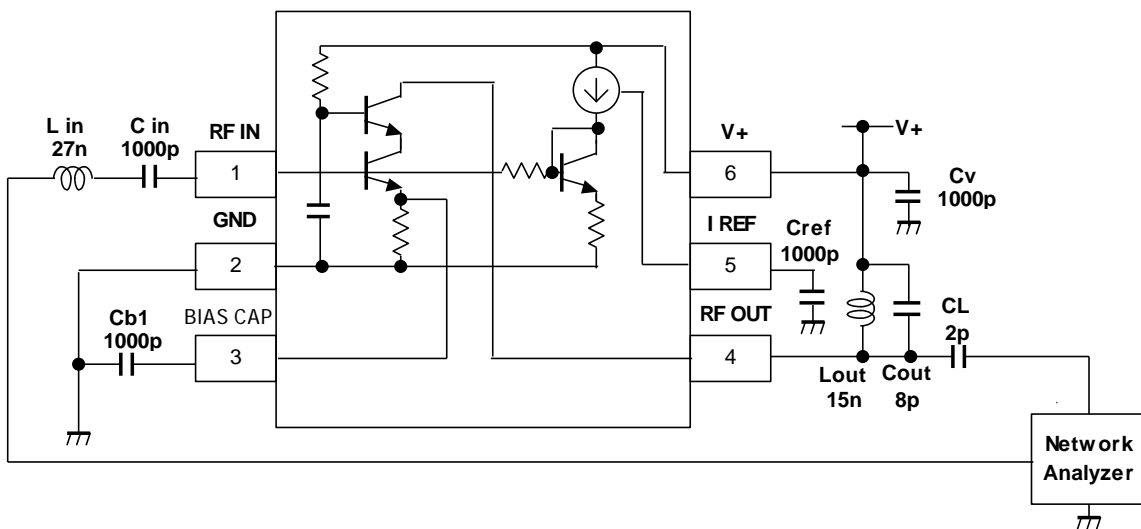


● Test Circuit 5 for S-Parameters (this item is not specified in "ELECTRICAL CHARACTERISTICS")

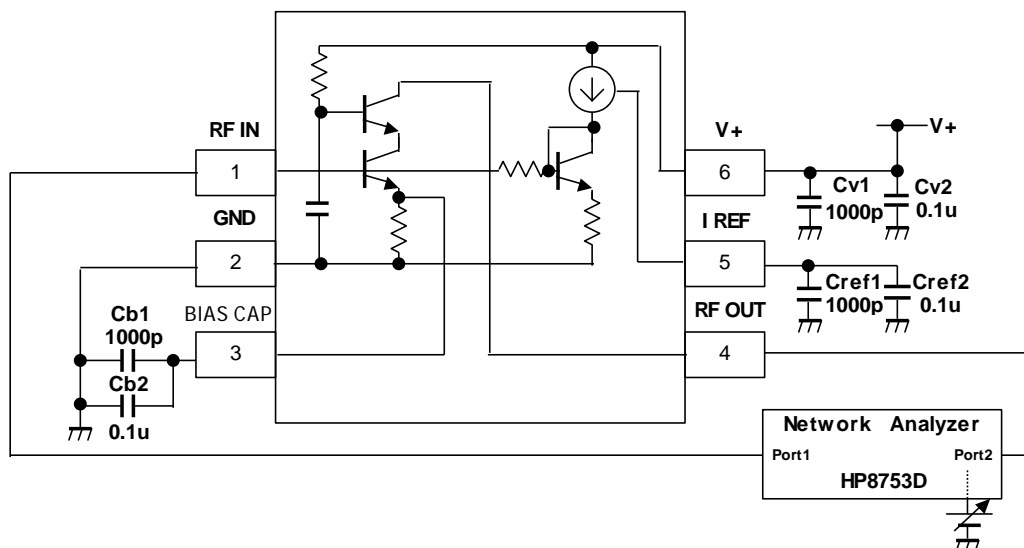


■ EVALUATION PC BOARD

The evaluation board is useful for your design and to have more understanding of the usage and performance of this device. This circuit is the same as TEST CIRCUIT. Note that this board is not prepared to show the recommendation of pattern and parts layout.

● Circuit Diagram

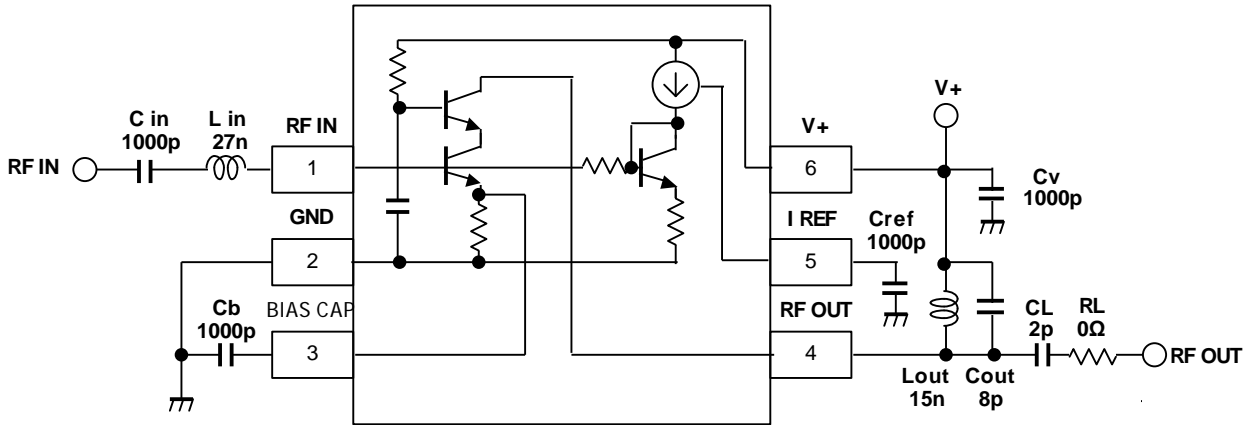

● Evaluation PC Board

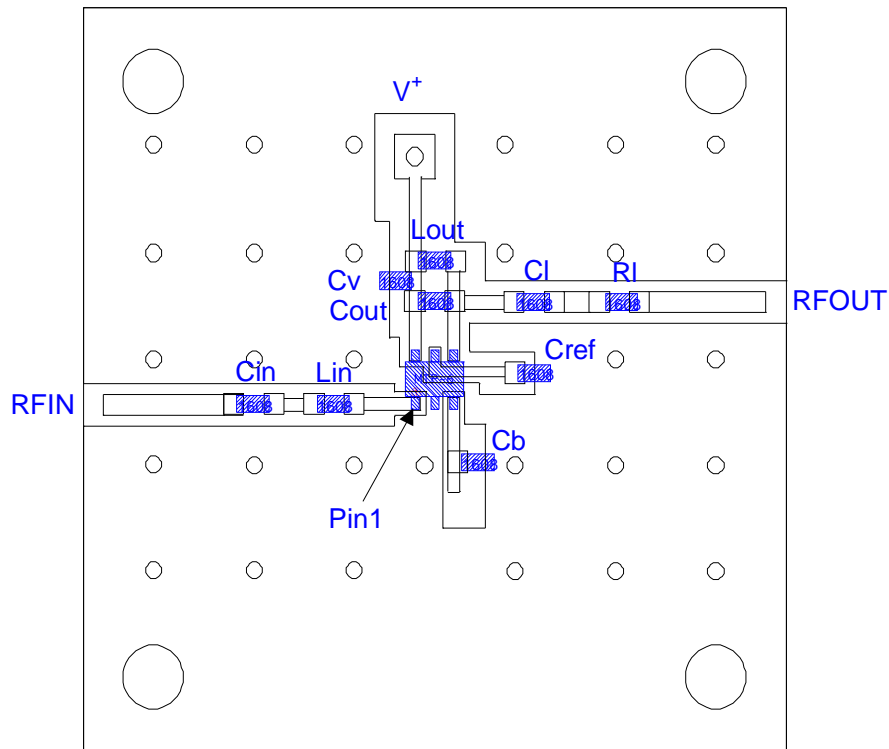

This evaluation board is designed to have the maximum value of PG at 400MHz.

By using the value of Test Circuit2, this board can have the maximum value of VG at 400MHz.


Cref is effective to obtain good NF. However, if the ground has a large noisy signal, NF may become worse.

■ TERMINAL FUNCTION (Ta=25°C, V+=1.9 V)


Pin No.	SYMBOL	EQUIVALENT CIRCUIT	VOLTAGE	FUNCTION
1	RF IN		1.09V	RF Input
2	GND	--	--	Ground
3	BIAS CAP		0.33V	<b>Bias Capacitance</b> An external decoupling capacitor is placed between this pin and ground.
4	RF OUT		V+	RF Output
5	IREF		0.75V	<b>Reference of Current Source</b> An external decoupling capacitor is placed between this pin and ground. An external resistor from this pin to ground can controls the reference current of current source and the related performances, such as NF and gain.
6	V+		--	<b>Supply Voltage</b> ESD protection transistor exists between V+ and ground.

■ TYPICAL CHARACTERISTICS ( Ta=25°C, V<sup>+</sup>=1.9V, unless otherwise noted )


Operating Current I<sub>cc</sub> versus Supply Voltage V<sup>+</sup>

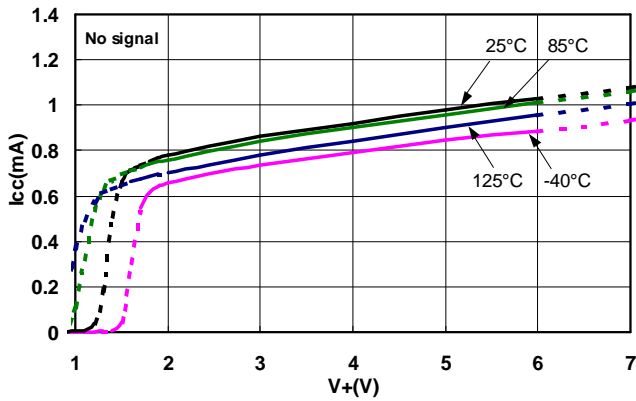


Power Gain PG versus Supply Voltage V<sup>+</sup>

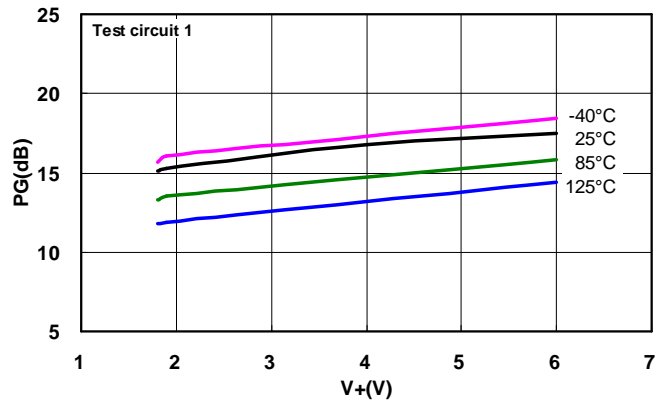


Pin at 1dB Compression Point P-1dB versus Supply Voltage V<sup>+</sup>

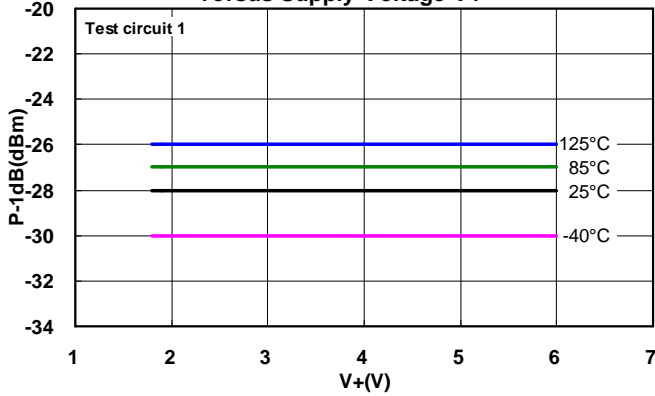


Voltage Gain VG versus Supply Voltage V<sup>+</sup>

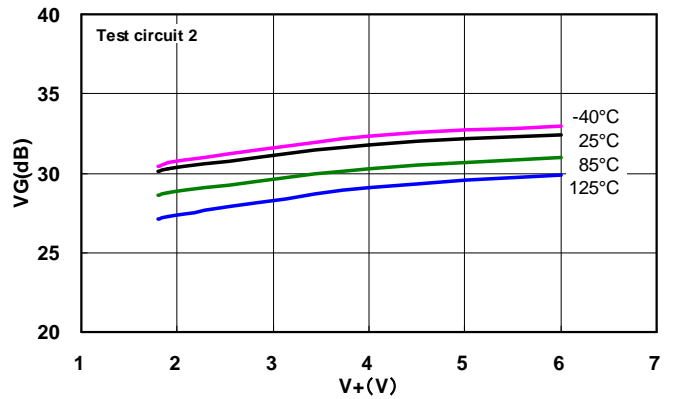


Noise Figure NF versus Supply Voltage V<sup>+</sup>

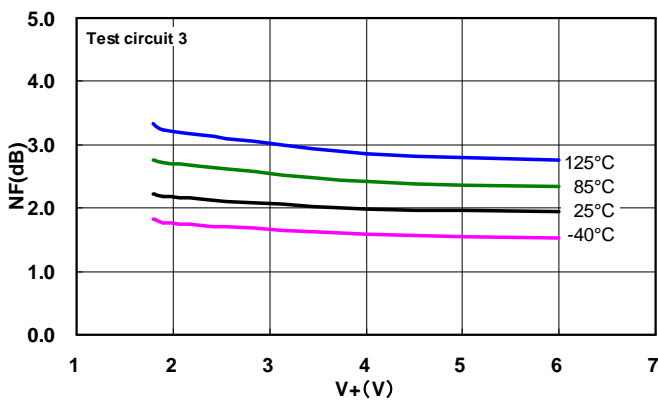


RF OUT-RF IN Isolation ISL versus Supply Voltage V<sup>+</sup>

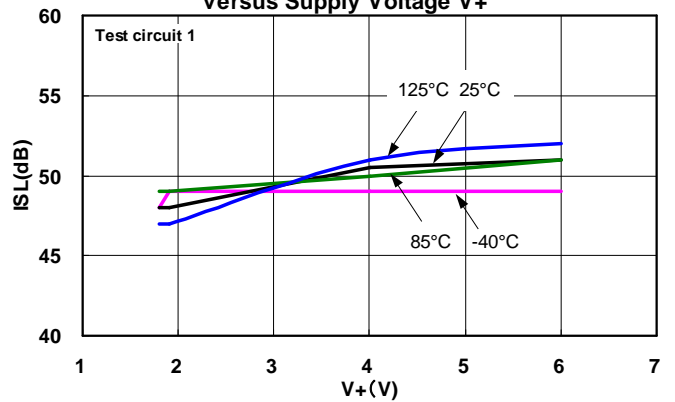


Operating Current  $I_{cc}$  versus Ambient Temperature  $T_a$

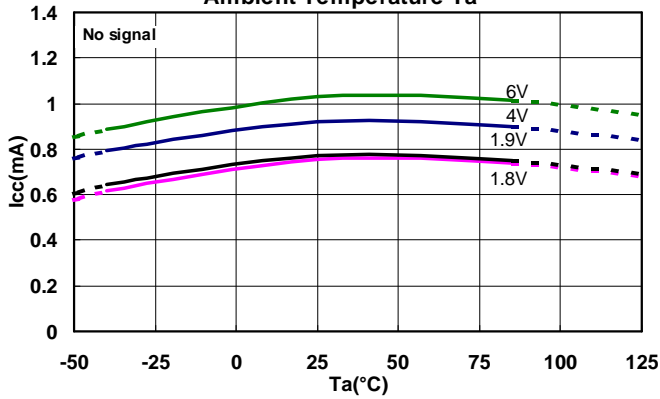


Power Gain  $P_G$  versus Ambient Temperature  $T_a$

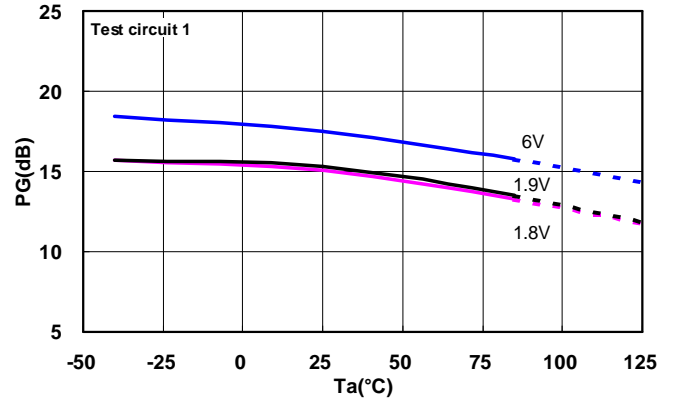


$P_{in}$  at 1dB Compression Point  $P_{-1dB}$  versus Ambient Temperature  $T_a$

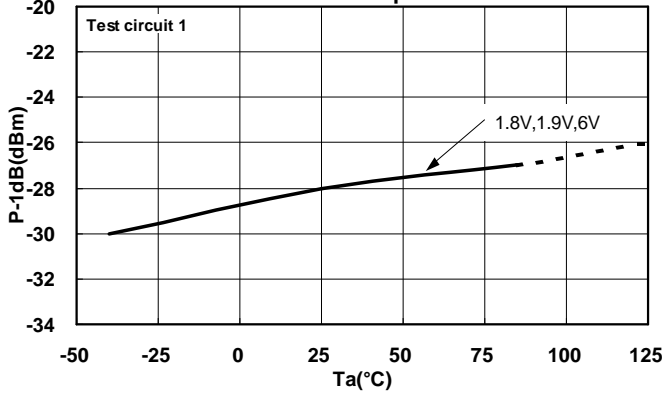


Voltage Gain  $V_G$  versus Ambient Temperature  $T_a$

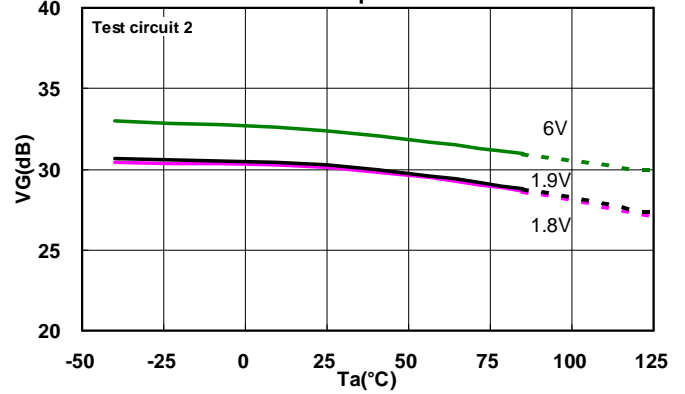

Noise Figure  $NF$  versus Ambient Temperature  $T_a$

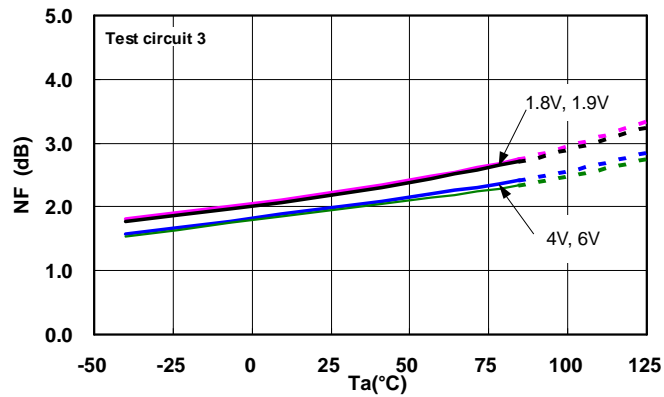


RF OUT-RF IN Isolation  $ISL$  versus Ambient Temperature  $T_a$

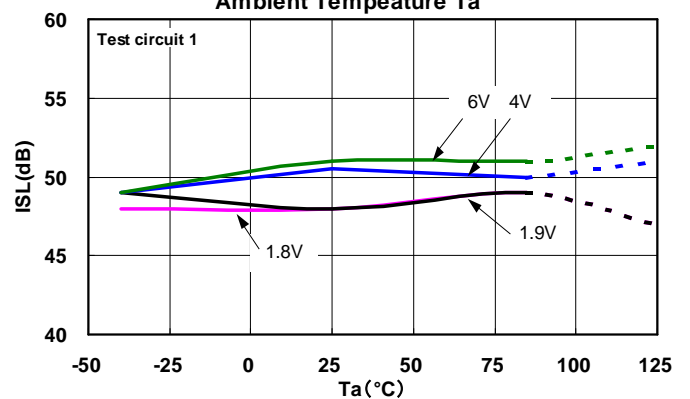





Output Power Pout/Operating Current Icc versus Input Power Pin

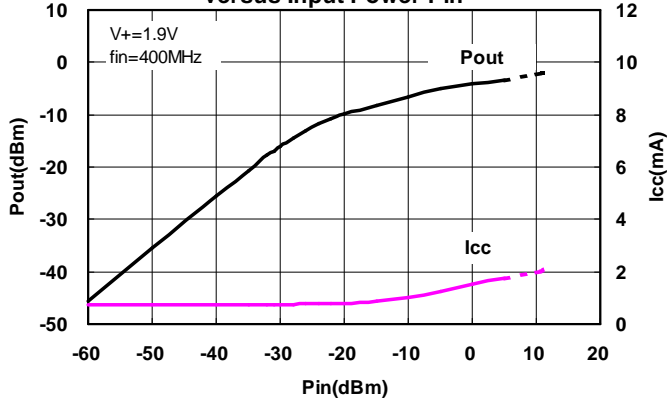


Power Gain PG/Noise Figure NF versus Frequency fin

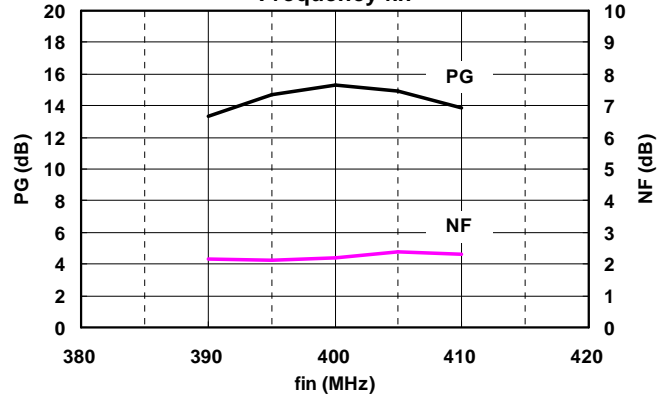


Input Return Loss |S11| versus Supply Voltage V+

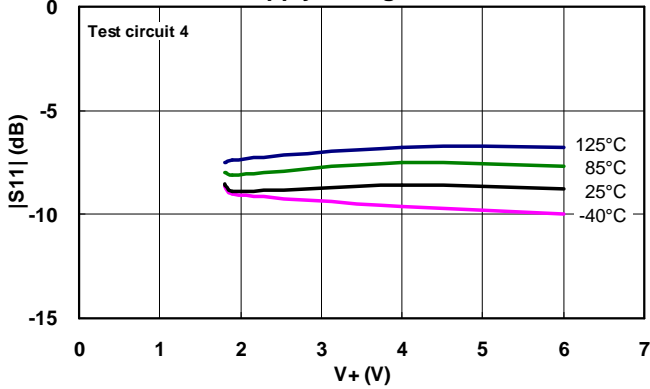


Output Return Loss |S22| versus Supply Voltage V+

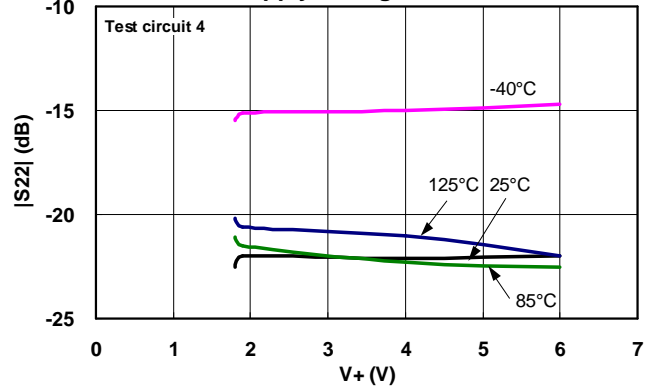





Input Return Loss |S11| versus Ambient Temperature Ta(°C)

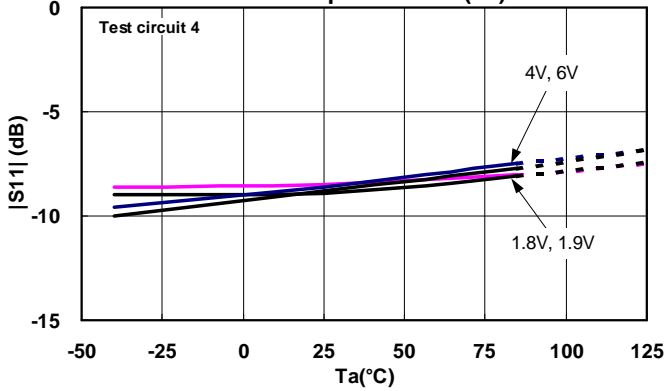



Output Return Loss |S22| versus Ambient Temperature Ta(°C)

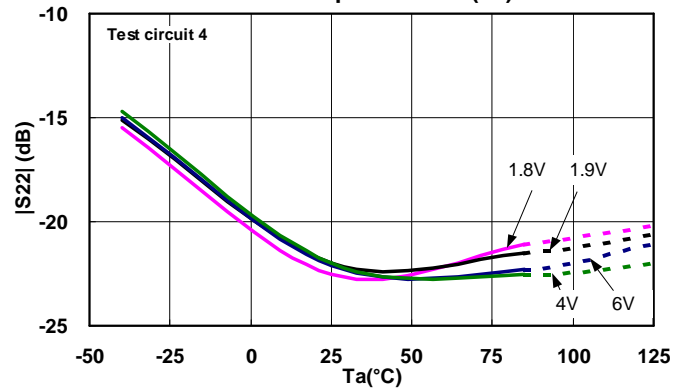

■ S Paramater (reference)

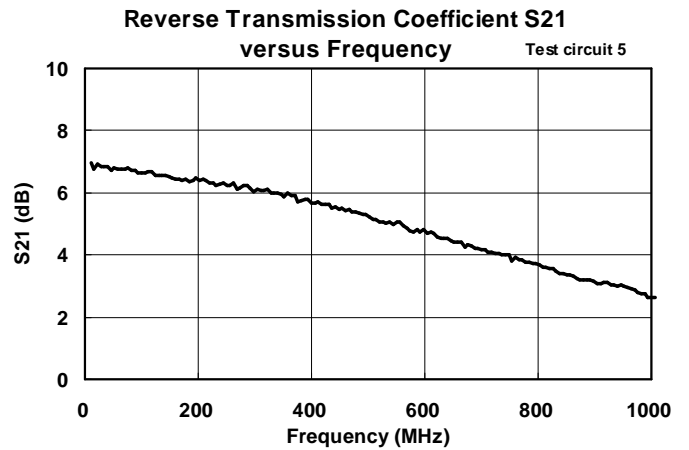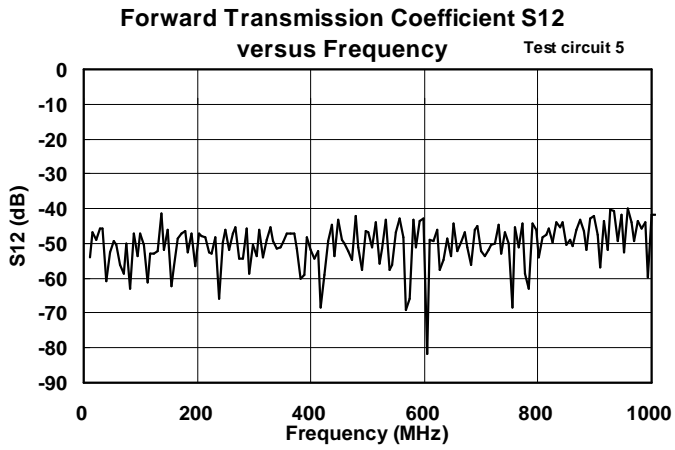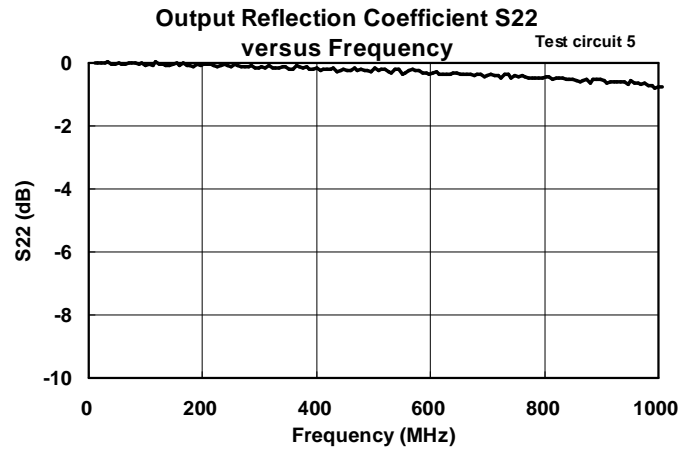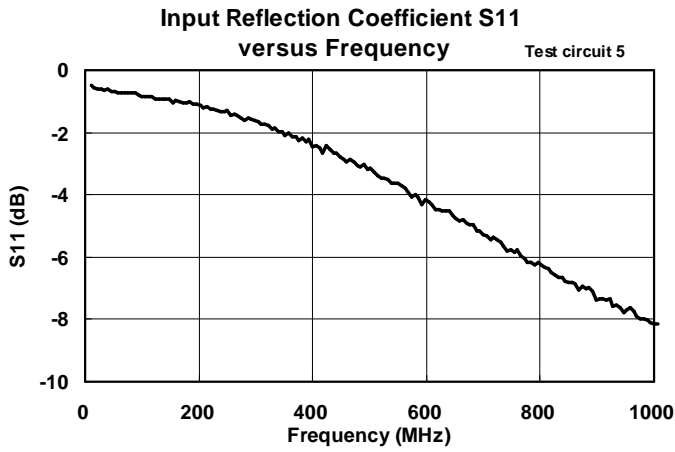

MHz	S11		S21		S12		S22	
	mag(units)	ang(deg)	mag(units)	ang(deg)	mag(units)	ang(deg)	mag(units)	ang(deg)
50	0.95	-2.16	2.23	178.17	0.002	81.16	1.00	-0.42
100	0.91	-14.64	2.14	161.70	0.004	-162.40	0.99	-3.27
300	0.84	-45.83	1.99	130.37	0.003	1.93	0.99	-10.85
322	0.82	-46.06	2.02	125.33	0.004	109.90	0.98	-9.94
400	0.75	-57.89	1.92	112.13	0.003	115.87	0.98	-12.42
430	0.75	-61.93	1.91	107.89	0.003	143.47	0.98	-13.94
500	0.70	-71.95	1.82	96.80	0.005	62.77	0.98	-16.36
700	0.54	-100.22	1.61	67.85	0.002	160.15	0.96	-21.84
1000	0.39	-146.15	1.35	26.94	0.008	60.40	0.92	-34.32

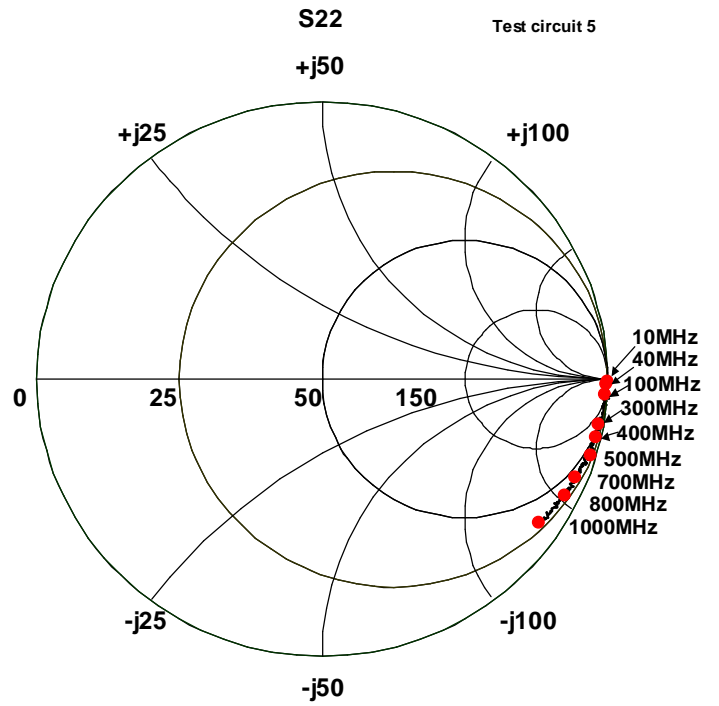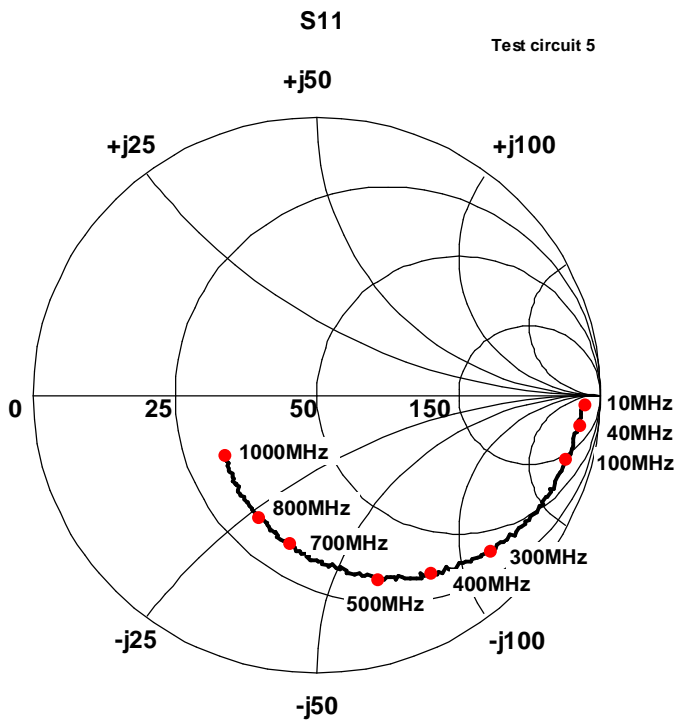

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.